

SAFES

VAULTS AND VAULT DOORS

CATALOGUE 2021



Chubbsafes
Trusted the world over.



Trusted the world over, Chubb safes is the oldest brand for safes, vaults and vault doors in the world. Chubb safes solutions are well known and appreciated for their unique combination of robustness, reliability and modern designs.

Having provided high-quality protection solutions for almost two centuries, Chubb safes combines experience with innovation to create trustworthy products for maximum protection against burglary, fire and explosives.

The Chubb safes solutions are rigorously tested by international and independent accreditation bodies to guarantee the best protection available.

Chubb safes
Trusted the world over.

CONTENTS

FINDING YOUR SAFE	5
TEST STANDARDS	6
CERTIFICATION OVERVIEW	8
LOCKING OPTIONS	9
PRODUCTS	
OPTIONAL FITTINGS	33

Air	10
Air Hotel	11
Viper	12
Senator	13
Cube Safe	14
E-Slot Safe	15
Omni MKII	16
Omni D/T MKII	17
DuoGuard	18
Europa GII	19
Europa GIII	20
Europa GV	21
Archive Cabinet	22
DPC	23
Fire File 25"	24
Fire File 31"	25
DataGuard NT	26
DataPlus	27
Pistol Safe	28
Deposit Container	29
Drug Safe	30
Instavault	31
Vault Doors	32

ICONS EXPLAINED





PLACE A SAFE
WHERE YOU ARE
RIGHT NOW!



Scan this QR code with
your smartphone or visit
www.chubbsafes.com

MAKE SECURITY A VIRTUAL PART OF YOUR EVERYDAY LIFE

Try out the new AR functionality at www.chubbsafes.com
and place a safe where you are standing right now!

All you need is a smartphone – no app needs to be installed.
Visit www.chubbsafes.com, select a safe and take the first
step towards making security a part of your everyday life.

WHICH **SAFE** IS RIGHT FOR YOU?

The most important initial question is what you want to protect – cash and valuables, documents or data media?

CASH AND VALUABLES

Choose from the burglary protection range. This includes safes, cabinets, vaults & vault doors, designed to withstand physical attacks in different strengths or Grades. Each Grade represents a particular “cash rating” which is the amount an insurer will cover. The actual amount of cover can vary between insurance companies and country, and may be different to the manufacturer’s recommended rating. You should always check what cover your insurance company is prepared to offer.

DOCUMENTS AND DATA MEDIA

Choose from the fire protection range which includes safes and filing cabinets designed to keep documents or data media safe from the effects of a fire.

DOCUMENTS

To survive a fire, documents require protection from temperatures higher than 170°C. Therefore cabinets have to be specifically designed, tested and then certified for this task. Without a credible certification, you cannot be sure that your documents are safe.

DATA MEDIA

The same is valid for data media, except here the cabinet must offer much greater protection due to the sensitivity of the material. If the inside of the cabinet exceeds a mere 50°C, then the information on a CD, DVD or tape will be destroyed.



CERTIFIED STRENGTH

To provide the appropriate level of protection, the products are tested to comply with the latest industry standards. The various certification tests carried out in independent laboratories for burglary or fire protection are conducted by experienced operators armed with plans of the product and a whole range of tools.

FOR BURGLARY PROTECTION, safes and vaults are awarded grades:

- For security cabinets, there are Grades S1 and S2 (EN 11450).
- For safes, vaults and vault doors, they are rated from Grade 0 to Grade XIII (EN 1143-1).
- High security locks are graded according to EN 1300.

During the certification process, door panels of the products, bolt works, locks and handles are tested. The certification tests include an attack program that is devised so that various break-in attempts can be made using a selection of tools. A correlation between tool type and the time for which each one is used can be used to obtain a resistance score (resistance unit). The higher the score, the higher the level of resistance. Based on the results obtained, the safe is given a classification and then listed in a resistance grade.

FOR FIRE PROTECTION, these standards vary according to whether you want to protect paper documents, digital media or other highly sensitive objects. This is because the temperature at which data media (e.g. 50°C) and documents (e.g. 170°C) deteriorate differs according to the item protected:

- In order to fully protect data media, industry standards indicate that products should carry ECB•S EN 1047-1, UL 72 Class 125 or NT Fire 017 60/120 DIS.


The ECB•S and UL tests monitor the internal temperature of the data cabinet until it has completely cooled down during the “soakout” period. Assessing products during this period is essential, since internal temperatures can peak up to six to eight hours after a fire has been extinguished. Such tests ensure that all products are comprehensively tested and, upon passing, will fully protect your data media for the specific time period stated.

- For document protection, all products must have an appropriate industry standard 30-, 60- or 120-minute paper certificate.


UL 72 Class 350, ECB•S EN 1047-1, EN 15659 or NT Fire 017 are acceptable standards for paper document protection.

LEVELS OF RESISTANCE

Alongside extremely strict standards, you will also find a number of others that are less stringent in terms of resistance.

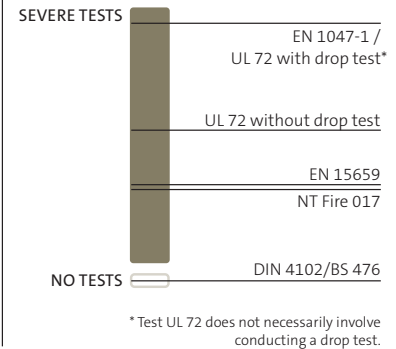

HIGHEST ALLOWED INSIDE TEMPERATURE

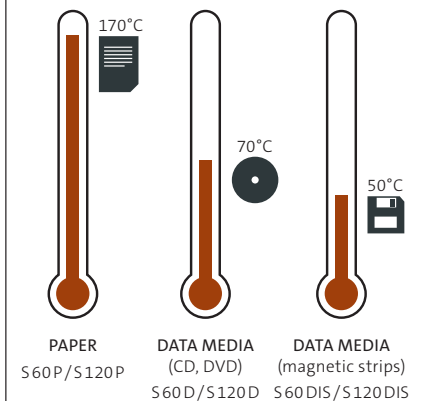

STANDARD IN BRIEF

STANDARDS	TEMPERATURE TEST	DROP TEST	PAPER	DATA MEDIA	COOLING
EN 1047-1	1090°C	9.15 metres	S 60 P (60 min.) / S 120 P (120 min.)	S 60 DIS (60 min.) / S 120 DIS (120 min.)	incl. the cooling period
UL 72	1090°C	9.15 metres (In UL the drop test is optional so always check what is being claimed)	Class 350 (½, 1, 2 hours)	Class 125 (½, 1, 2 hours)	incl. the cooling period
EN 15659	850°C	no	LFS 30 P (30 min.) / LFS 60 P (60 min.)	no application	not tested
NT Fire 017	927°C	no	60 paper (60 min.) / 120 paper (120 min.)	60 diskettes (60 min.) / 120 diskette (120 min.)	not tested
DIN 4102/BS 476	not tested	not tested	not tested	not tested	not tested

EUROPEAN CERTIFICATION FOR SAFES, VAULTS AND VAULT DOORS EXPLAINED

In order to attest to the quality of a certified product, an information plate is adhered to the inside of the product. This provides you with guarantees that the product has been tested and manufactured in an environment that has been checked by the certifying body.

Below is shown the ECB•S label and the details listed on the information plate.

BURGLARY PROTECTION CERTIFICATION

SERIAL NO.

Each product can be identified by a unique serial number. This number is given by the certifying body

EN 1143-1/EN 14450

The European standard that the product meets

CERT. MARK. NO.

Certificate number issued by the certifying body

RESISTANCE GRADE


Resistance classes

WEIGHT

The safe's net weight. A 5% tolerance in the net weight indicated is accepted

YEAR OF MANUFACTURE

The year that the product was manufactured

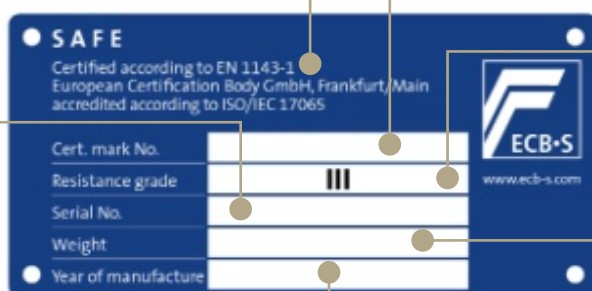

FIRE PROTECTION CERTIFICATION

SERIAL NO.

Each product can be identified by a unique serial number. This number is given by the certifying body

EN 1047-1/EN 15659

The European standard that the product meets

CERT. MARK. NO.

Certificate number issued by the certifying body

PROTECTION CLASS


Resistance classes

WEIGHT

The safe's net weight. A 10% tolerance in the net weight indicated is accepted

YEAR OF MANUFACTURE

The year that the product was manufactured

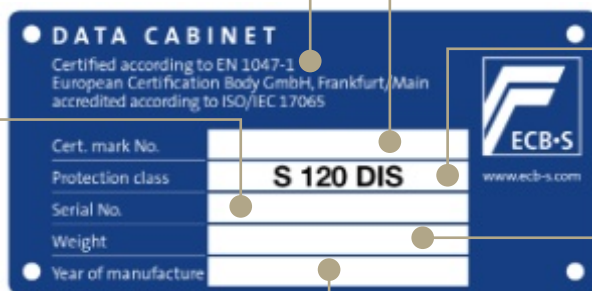

Fire testing is undertaken by independent laboratories with certificates issued by certification authorities. Here are some examples of test institutes and certificates that you may encounter: ECB•S, UL, iBMB, MPA Dresden, Applus RTD, SP, VdS.

FOR MORE DETAILED INFORMATION, contact your insurance company or visit the chubbsafes.com website.

SAFES, VAULTS AND VAULT DOORS BY CERTIFICATION

PRODUCT	STANDARD	CLASSIFICATION	CERTIFICATION BODY
BURGLARY PROTECTION			
Air	n/a	n/a	n/a
Cube Safe	n/a	n/a	n/a
E-Slot Safe	n/a	n/a	n/a
Drug Safe	n/a	n/a	n/a
Omni Drawer Trap MKII	n/a	n/a	n/a
Europa GIII	EN 1143-1 & AS/NZS 3809	Grade III & Level 3	ECB+S & AS/NZS
Europa GV	EN 1143-1 & AS/NZS 3809	Grade V & Level 5	ECB+S & AS/NZS
Pistol Safe	n/a	n/a	n/a
Deposit Container	n/a	n/a	n/a
InstaVault	n/a	n/a	n/a
Vault Doors	n/a	n/a	n/a
FIRE PROTECTION			
Archive Cabinet	n/a	n/a	n/a
DataGuard NT	NT Fire 017	120 Diskette	SP
Fire File 25"	UL 72 Class 350	1h Fire	UL
Fire File 31"	UL 72 Class 350	1h to 2h Fire	UL
COMBINED BURGLARY & FIRE PROTECTION			
Viper	EN 14450 & EN 15659	Level S2 & 30 min Paper	ECB+S
Senator	EN 1143-1 & EN 15659	Grade I & LFS 30 P	ECB+S
DPC	UL 72 Class 350	2h	UL
Omni MKII	JIS S 1037 : 1989	45min	JIS
DuoGuard	EN 1143-1 & EN 1047-1	Grade 0 to I & S 60 P	ECB+S
DataPlus	EN 14450 & EN 1047-1 & UL 72 Class 125	Level S2 & S 120 DIS & 2h Fire	ECB+S & UL
Europa GII	EN 1143-1 & NT Fire 017	Grade II & Level 2	ECB+S

LOCKING OPTIONS

Depending on the range, you can customise your product with a different lock. Thus you can benefit from a comprehensive lock offering that includes the latest industry solutions, which offer a wide range of features. So whether it be the “mechanical combination” lock or an electronic solution, you can be sure to have a lock that will meet your security needs. Below the key terms associated with the range of locks.

DEFINITIONS

KEY LOCK: A manual key-operated lock.

MECHANICAL COMBINATION: A mechanical keyless dial lock with a changeable combination.

ELECTRONIC LOCK: An electronically-operated keypad lock with a changeable combination.

MANAGER MODE: Allows one user to control the functions of other combination holders.

NUMBER OF USERS: The number of users able to program in their own access code.

DURESS FEATURE: An alarm engineer can link the lock into a monitored alarm system. Then, using a given procedure, the lock can be operated, the safe opened and a silent signal given to the monitoring station that this is being done under duress.

TIME DELAY: This feature allows for a pre-set delay between operating the lock and being able to open the safe. The operation may vary between lock types.

TIME LOCK: Time lock allows the user to set periods during which the lock may be operated, e.g. during business hours only. The options available will vary between locks.

AUDIT TRAIL: The lock is able to give a report (it will vary in detail from model to model) of usage and may show times of operation, codes used and operations performed.

DUAL CONTROL: Allows two users to enter their details before any operation can be performed.

PLANNING, DELIVERY & INSTALLATION

Once you have selected a product, you can also chose the installation survey option. We will then agree with you on a flexible installation schedule. The flexibility of the installation process is evidence of Gunnebo's commitment to ensuring the cost- and time-efficient completion of your purchase.

Our products are delivered and installed by trained Gunnebo installers. Whatever the delivery environment (e.g. large bank or small office), you can be assured that the installers will take the greatest care. We are also focused on making sure the service on offer is achievable to the highest standards of workmanship, and is promptly completed within the contracted timescales.



MODEL SHOWN: AIR M-15



AIR

BURGLARY PROTECTION FOR YOUR VALUABLES

KEY FEATURES

- Compact safe for the home, hotel room or office.
- Two models available: 16- and 24-litres capacities. The largest is designed to accommodate most laptop computers.
- Choice of locking options: available with a double-bitted key lock or an electronic lock with a programmable code.
- Emergency key override facility for the electronic lock should battery power ever fail.
- Patented “anti-bump” technology which affords the electronic lock protection against impact attacks.
- Tamper-evident keypad.
- Ready for base and for rear fixing, supplied with four expansion anchors.
- Inner base carpet.
- Key hooks included on all electronic models.

PRODUCT SPECIFICATIONS

Model	External Height (mm)	External Width (mm)	External Depth* (mm)	Internal Height (mm)	Internal Width (mm)	Internal Depth (mm)	Capacity (litres)	Net Weight (kg)	No. of Shelves
M-15	250	350	250	240	340	200	16	9	1
M-25	200	430	350	190	420	300	24	11	0

* In electronic models, add 20mm to allow for keypad projection.



MODEL SHOWN: AIR HOTEL



AIR HOTEL

BURGLARY PROTECTION FOR YOUR VALUABLES

KEY FEATURES

- Compact safe for hotel rooms, student accommodation or other locations with frequent occupancy turnover.
- Steel door and body with dual, plated steel moving boltwork.
- User-friendly electronic lock.
- Authorised control and access via electronic lock or hand-held programming unit.

PRODUCT SPECIFICATIONS

Model	External Height (mm)	External Width (mm)	External Depth (mm)	Internal Height (mm)	Internal Width (mm)	Internal Depth (mm)	Capacity (litres)	Net Weight (kg)
M-25	200	430	350	190	420	300	24	12

Dimensions exclude handle and hinge projections.



MODEL SHOWN: Viper S2 30P M-50

VIPER

BURGLARY & FIRE-RESISTANT PROTECTION



KEY FEATURES

- \$5,000 Cash Rating
- Combined fire and burglary protection in one safe.
- EN 14450 certified by ECB•S to level S2 burglary protection.
- EN 15659 certified by ECB•S for 30-minutes' fire protection for documents.
- Choice of 6 models: from 11- to 91-litre capacity.
- Choice of locking options in all models: EN 1300 certified double-bitted key lock or EN 1300 certified electronic lock.
- Dual base fixing holes, supplied with two concrete anchor bolts.
- Ideal safe for protecting cash and valuable items, as well as passports, title deeds and other important documents in the home and office.
- The safe door is secured using the new revolutionary “V” bolt system. The design of the locking bolts helps maintain door integrity both when under physical attack and during a fire.
- The safe is prepared & anchoring kit is supplied to allow the HomeSafe S2 30P range to be securely base- or rear-fixed to resist unauthorised removal once installed.

PRODUCT SPECIFICATIONS

Model	External Height (mm)	External Width (mm)	External Depth (mm)	Internal Height (mm)	Internal Width (mm)	Internal Depth (mm)	Capacity (litres)	Net Weight (kg)	No. of Shelves
M-10	300	360	300	210	270	191	11	24	1
M-20	300	445	390	210	355	281	21	32	1
M-35	450	445	390	360	355	281	36	42	1
M-50	600	445	390	510	355	281	51	53	1
M-70	800	445	390	710	355	281	71	65	2
M-90	1000	445	390	910	355	281	91	78	2


Dimensions exclude handle and hinge projections.



MODEL SHOWN: SENATOR M-65

SENATOR

BURGLARY & FIRE-RESISTANT PROTECTION



KEY FEATURES

- \$45,000 Cash Rating
- Dual Certification: Burglary (EN 1143-1) Grade I and Fire (EN 15659, LFS 30 P).
- Certified locks: EN 1300 certified Class A key lock or Class B high-security electronic lock.
- Four models available: 32, 46, 63 or 190 litres.
- Secure bolt work and traditional heavy weight design.
- Enhanced design: removable door for easy installation and a reduced overall weight by 15%.
- Fittings: each safe is supplied with one shelf as standard.
- Attractive appearance: single-colour door and body in dark grey (RAL 7016).
- Ideal for the home or office.

PRODUCT SPECIFICATIONS

Model	External Height (mm)	External Width (mm)	External Depth (mm)	Internal Height (mm)	Internal Width (mm)	Internal Depth (mm)	Capacity (litres)	Net Weight (kg)
M-30	370	500	403	290	420	263	32	121
M-45	500	500	403	420	420	263	46	150
M-65	650	500	403	570	420	263	63	183
M-190	862	654	563	782	574	423	190	329

Dimensions exclude handle and hinge projections.



MODEL SHOWN: CUBE SAFE SC1

CUBE SAFE

BURGLARY PROTECTION FOR YOUR VALUABLES



KEY FEATURES

- \$5,000 cash rating
- Burglary protection for around your home or office
- Low weight barrier material that optimise cost, transport and installation
- Body and door are made from 12mm solid steel
- Digital electronic lock
- Backup battery pack provided and over-ride key
- Fixed shelf included providing organised storage

PRODUCT SPECIFICATIONS

Model	External Height (mm)	External Width (mm)	External Depth (mm)	Internal Height (mm)	Internal Width (mm)	Internal Depth (mm)	Capacity (litres)	Net Weight (kg)	Standard Internal Fittings
SC1	355	355	355	330	330	290	32	75	1 shelf

Dimensions exclude handle and hinge projections.



MODEL SHOWN: E-SLOT SAFE SES

E-SLOT SAFE

BURGLARY RESISTANT SAFE



KEY FEATURES

- Up to \$5000 cash rating
- Burglary resistant protection small deposit safe designed to provide safe secure storage for cash
- Body and door are made from 12mm solid steel
- Allows anyone to drop items into the slot
- Access only by digital electronic lock
- Backup battery pack provided
- Fixed shelf included

PRODUCT SPECIFICATIONS

Model	External Height (mm)	External Width (mm)	External Depth (mm)	Internal Height (mm)	Internal Width (mm)	Internal Depth (mm)	Capacity (litres)	Net Weight (kg)	Standard Internal Fittings
SES	355	355	355	330	330	290	32	75	-

Dimensions exclude handle and hinge projections.



OMNI MKII

BURGLARY & FIRE-RESISTANT SAFE



KEY FEATURES

- \$25,000 Cash Rating
- Body barrier thickness of 65mm; constructed from steel, welded throughout and filled with specially formulated Chubb safes barrier material.
- A solid composite 35mm thick door is combined with additional protection plates for crucial locking areas.
- Solid steel moving bolts with a 28.5mm diameter affix the door to the body, while fixed “anti-heeling” bolts on both front and rear edges protect the door from prying attack.
- Glass relocker to ensure bolts to remain firmly in place should an attack on the lock occur (featured on model 30 and above).
- A Polyurethane base paint finish is used to coat the body and door. The paint is both scratch resistant and durable.
- Tested in accordance with EN 14450 Level S2, certified by ECB•S.
- Omni has been tested in accordance with EN 15659 LFS, and is certified to level 60P by ECB•S giving 1 hour fire protection.

PRODUCT SPECIFICATIONS

Model	External Height (mm)	External Width (mm)	External Depth (mm)	Internal Height (mm)	Internal Width (mm)	Internal Depth (mm)	Capacity (litres)	Net Weight (kg)	Standard Internal Fittings
M-15	410	360	360	278	230	230	13	104	1 Shelf
M-30	488	435	435	356	280	240	31	157	1 Shelf, 1 Drawer
M-40	590	435	445	458	305	305	39	180	1 Shelf, 1 Drawer
M-75	590	550	550	458	420	420	76	257	1 Shelf, 1 Drawer
M-95	717	550	550	585	420	420	97	293	1 Shelf, 1 Drawer
M-125	894	550	550	762	420	420	127	347	1 Shelf, 1 Drawer
M-225	1047	640	640	915	510	510	227	481	1 Shelf, 1 Drawer

*Handle projection is 56mm.



MODEL SHOWN: OMNI DRAWER TRAP SIZE 5

OMNI D/T MKII

BURGLARY RESISTANT SAFE



KEY FEATURES

- \$25,000 Cash Rating
- Combined fire and burglary protection for home, office and retail environments where access to the safe is required for deposit without the need to open the safe
- Tested to the highest quality in its class against attack. Approved by Sold Secure to Gold Standard for burglary protection. Sold Secure is an independent testing authority approved by the British Home Office
- Providing a Drawer Trap adds an additional layer of security as only one person is required to have full access to the safe
- Secured with combination lock as standard
- 10mm solid steel door
- Safe is fitted with a drawer trap deposit
- Supplied with glass relocker
- A second lock can be fitted (sizes 5 and 7)
- Available in 3 sizes
- Deposit draw fitted with Mauer key lock

PRODUCT SPECIFICATIONS

Model	External Height (mm)	External Width (mm)	External Depth (mm)	Internal Height (mm)	Internal Width (mm)	Internal Depth (mm)	Capacity (litres)	Net Weight (kg)	Standard Internal Fittings
Sz 2	742	435	435	356	305	305	33	270	1 anti-spill plate
Sz 5	917	550	550	585	420	420	103	515	1 anti-spill plate
Sz 7	1301	640	640	915	510	510	236	866	1 anti-spill plate


*Handle projection is 56mm.



MODEL SHOWN: DUOGUARD 440

DUOGUARD

BURGLARY & FIRE-RESISTANT PROTECTION



KEY FEATURES

- Burglary protection in accordance with EN 1143-1, as certified by ECB•S for Grades 0 and I.
- Approved by ECB•S in accordance with EN 1047-1 in class S 60 P for one hour's fire protection of paper documents.
- Torch-resistant barrier material – Dualite – ensures burglary and fire protection whilst also reducing its total weight and minimising transportation and installation costs.
- Ergonomic soft-touch handle and a range of internal fittings to maximise storage capacity.
- The three-way boltwork is made from solid steel bolts.
- A Class A mechanical key lock or a Class B high-security electronic lock, approved in accordance with EN 1300, are both available as primary lock options.
- Fitted with an active relocker and anti-drilling plates incorporated into the boltwork to withstand burglary attempts. (manganese-coated steel plates for Grade 0 and T200X carbide-clad steel plates for Grade I).

PRODUCT SPECIFICATIONS

Model	External Height (mm)	External Width (mm)	External Depth (mm)	Internal Height (mm)	Internal Width (mm)	Internal Depth (mm)	Capacity (litres)	Net Weight (kg)
40	435	500	456	335	400	295	40	100
60	530	500	521	430	400	360	62	123
110	690	600	561	590	500	386	114	175
150	875	600	561	775	500	386	150	212
200	1150	600	561	1050	500	386	203	264
300	1600	600	561	1500	500	386	290	337
350	1600	675	585	1500	575	410	354	374
440	1850	675	615	1750	575	440	443	436

SPECIFICATIONS FOR **OPTIONAL FITTINGS** ARE AVAILABLE ON PAGE 33

Dimensions exclude handle and hinge projections.



EUROPA GII

BURGLARY-RESISTANT PROTECTION



KEY FEATURES

- \$60,000 Cash Rating
- Professional high security safe protecting valuables up to the highest certified resistance levels, certified by ECB•S in accordance with the stringent European standard, EN 1143-1. Europa hereby complies and is certified with the world's strictest requirements for quality and burglary resistance
- A range of tools typically used in professional burglary attempts were used to test Europa's level of resistance according to EN 1143-1, from basic equipment, such as hammers and simple drills, to sophisticated thermal and electrical equipment, such as oxyacetylene torches and diamond disc cutters
- Europa Grade II is certified NT FIRE 017 – 60 Paper for one-hour protection of paper from fire by SP Technical Research Institute of Sweden
- Each safe can be equipped with high quality fittings to maximize storage requirements
- Europa can be customized with a choice of locking options, deposits, shelves and lockable drawer deposits in order to meet customer requirements
- Base fixing is standard on all models

PRODUCT SPECIFICATIONS

Model	External Height (mm)	External Width (mm)	External Depth (mm)	Internal Height (mm)	Internal Width (mm)	Internal Depth (mm)	Capacity (litres)	Net Weight (kg)	Standard Internal Fittings
Size 1	628	528	603	460	360	360	60	381	1 Shelf, 2 Drawers
Size 2	718	668	663	550	500	420	116	536	2 Shelf, 2 Drawers
Size 3	1018	668	663	850	500	420	179	705	2 Shelves, 2 Drawers
Size 4	1208	668	773	1040	500	530	276	880	2 Shelves, 2 Drawers
Size 5	1468	668	773	1300	500	530	345	1060	2 Shelves, 2 Drawers


Dimensions exclude handle and hinge projections.



MODEL SHOWN: EUROPA G III SIZE 5

EUROPA G III

BURGLARY-RESISTANT SAFE



KEY FEATURES

- \$100,000 Cash Rating
- Burglary protection for high level business and financial institutions
- Certified by ECB•S according to EN 1143-1
- Certified to Level 3 according to AS/NZS 3809 (Safes and Strongrooms)
- Chubb safes special barrier material is applied in the construction of the safe to protect against varying kinds of burglary attack
- Active and passive relocking system
- Torch and Drill Resistant (TDR)
- Lock alternatives:
 - Combination lock and key lock or
 - Electronic lock and key lock
 - Optional time delay locks available
- Choice of 4 sizes ranging from 179 to 503 litres
- Optional internal fittings: deposits, shelves and lockable drawer deposits in order to meet customer requirements.

PRODUCT SPECIFICATIONS

Model	External Height (mm)	External Width (mm)	External Depth (mm)	Depth incl. Handle & Hinge	Internal Height (mm)	Internal Width (mm)	Internal Depth (mm)	Depth with door at 90 open	Width with door fully open	Capacity (litres)	Net Weight (kg)	Standard Internal Fittings
Sz 3	1018	668	663	720	850	500	420	1277	1232	179	717	2 shelves, 2 drawers
Sz 4	1208	668	773	830	1040	500	530	1387	1232	276	920	2 shelves, 2 drawers
Sz 5	1468	668	773	830	1300	500	530	1387	1232	345	1084	2 shelves, 2 drawers
Sz 6	1796	903	663	720	1628	735	420	1512	1691	503	1400	2 shelves, 2 drawers
Sz 7	1796	903	773	830	1628	735	530	1622	1691	634	1620	2 shelves, 2 drawers


Dimensions exclude handle and hinge projections.



MODEL SHOWN EUROPA G V SIZE 6

EUROPA GV

BURGLARY-RESISTANT PROTECTION



KEY FEATURES

- \$300,000 Cash Rating
- Burglary protection for high level business and financial institutions
- Certified by ECB•S according to EN 1143-1
- Certified to Level 5 according to AS/NZS 3809 (Safes and Strongrooms)
- Chubbsafes special barrier material is applied in the construction of the safe to protect against varying kinds of burglary attack
- Active and passive relocking system
- Torch and Drill Resistant (TDR)
- Lock alternatives:
 - Combination lock and key lock or
 - Electronic lock and key lock
 - Optional time delay locks available
- Choice of 2 sizes ranging from 400 to 503 litres
- Optional internal fittings: deposits, shelves and lockable drawer deposits in order to meet customer requirements

PRODUCT SPECIFICATIONS

Model	External Height (mm)	External Width (mm)	External Depth (mm)	Depth incl. Handle & Hinge	Internal Height (mm)	Internal Width (mm)	Internal Depth (mm)	Depth with door at 90 open	Width with door fully open	Capacity (litres)	Net Weight (kg)	Standard Internal Fittings
Sz 5 (M-400)	1468	668	773	830	1338	538	554	1387	1232	400	1150	2 shelves, 2 drawers
Sz 6 (M-570)	1796	903	663	720	1666	773	444	1512	1691	572	1520	2 shelves, 2 drawers

Dimensions exclude handle and hinge projections. *Denotes that items not stocked - order as required.



MODEL SHOWN: ARCHIVE CABINET M-450



ARCHIVE CABINET

FIRE-RESISTANT DOCUMENT PROTECTION

KEY FEATURES

- Archive Cabinet has a steel, double-wall construction insulated with special fire-resistant barrier material.
- Available in four models with a generous storage capacity ranging from 325 to 880 litres.
- Secured by three-way boltwork, locking at the top, bottom and side of the door.
- EN 1300 Class A certified key lock fitted as standard.
- A wide range of flexible fittings available to suit all types of storage requirements, including removable shelves, extendable file frames for A4 or Folio files and a lockable compartment.
- Anchor points in the base allow the cabinet to be fixed to the floor.
- All cabinets have a light-grey, powder-coated finish, suitable for any office space.

PRODUCT SPECIFICATIONS

Model	External Height (mm)	External Width (mm)	External Depth (mm)	Internal Height (mm)	Internal Width (mm)	Internal Depth (mm)	Capacity (litres)	Net Weight (kg)	No. of Shelves
M-325	1500	700	550	1290	594	430	325	95	3
M-450	1950	700	550	1780	594	430	450	120	4
M-640	1950	950	550	1780	844	430	640	150	4
M-880	1950	1260	550	1780	1154	430	880	200	4

SPECIFICATIONS FOR **OPTIONAL FITTINGS** ARE AVAILABLE ON PAGE 33

Dimensions exclude handle and hinge projections.



MODEL SHOWN: DPC 400W



UL 72
Class 350
2hr

DPC

FIRE-RESISTANT DOCUMENT PROTECTION

KEY FEATURES

- High capacity storage solution with fire protection, ideal for office environments such as banks and financial institutions.
- Certified by Underwriter's Laboratories according to UL 72 Class 350 for up to 120 minutes fire protection.
- Automatic mechanism to ensure bolts are in place and able to resist fire whenever the door is closed.
- Interlocking door system on double door models to prevent the cabinet from being left open.
- Available in five high-capacity sizes from 160 to 670 litres.
- EN 1300 Class A certified key lock fitted as standard.
- Dual locking or single electronic or manual combination locks available at additional costs.
- Anchoring kit to fix the safe on the floor and prevent from unauthorised removal available on request.
- Shelf/shelves supplied as standard.
- Optional internal fittings available including pull out file frames and lockable drawers and cupboards.
- RAL 7035 body & RAL 7016 facia panel.

PRODUCT SPECIFICATIONS

Model	External Height (mm)	External Width* (mm)	External Depth** (mm)	Internal Height (mm)	Internal Width*** (mm)	Internal Depth (mm)	Capacity (litres)	Net Weight (kg)	No. of Shelves	No. of Doors
160	859	759	605	700	600	382	160	235	1	1
240	1209	759	605	1050	600	382	240	315	2	1
400W	1209	1160	605	1050	1000	382	401	500	2	2
320	1559	759	605	1400	600	382	321	395	3	1
670	1909	1160	605	1750	1000	382	670	650	4	2

SPECIFICATIONS FOR **OPTIONAL FITTINGS** ARE AVAILABLE ON PAGE 33

* Projection of hinge (27mm) not included. ** Projection of handle (54mm) not included. *** Width excluding shelf racking strips. Racking reduces the internal width by 10mm.



MODEL SHOWN: FIRE FILE 25" M-210

FIRE FILE 25"

FIRE-RESISTANT DOCUMENT PROTECTION



KEY FEATURES

- Certified for one hour's fire protection of documents in accordance with UL Standard 72, Class 350 Endurance.
- Maximised capacity that users can take full advantage of for their storage requirements.
- Chubb safes' Fire File 25" is available in two- or four-drawer versions.
- Easy-to-operate day catch to secure the drawers when closed.
- Units do not have to be locked to provide fire protection: they just have to be pushed closed.
- High-quality steel sliders to ensure comfortable operation and full drawer access.
- Lighter weight construction which means smoother transportation and installation.
- All models fitted with high-security locks as standard.
- Light Grey RAL 7035, powder-coated finish and modern design which blends nicely into any office environment.

PRODUCT SPECIFICATIONS

Model	External Height (mm)	External Width (mm)	External Depth (mm)	Internal Height (mm)	Internal Width (mm)	Internal Depth (mm)	Capacity (litres)	Net Weight (kg)	No. of Drawers
2 Drawer	784	551	635	290	387	460	104	164	2
4 Drawer	1510	551	635	290	387	460	208	291	4



MODEL SHOWN: FIRE FILE 31" M-270

FIRE FILE 31"

FIRE-RESISTANT DOCUMENT PROTECTION



KEY FEATURES

- Certified according with UL standard 72 in Class 350 Endurance for both 1 hour and 2 hour duration.
- Available in two- or four-drawer versions.
- On the two-hour certified models, each drawer is fire-protected. Even if one of the drawers is accidentally left open, the other closed drawers are still protected by the built in fire resistance partitions.
- Easy-to-operate day catch to secure the drawers when closed. Units do not have to be locked to provide fire protection but just to be pushed closed.
- High-quality steel sliders to ensure comfortable operation and full drawer access.
- Lighter weight construction which means smoother transportation and installation.
- Fitted with high-security locks as standard.
- Interlocking system that prevents more than one drawer being open at once and eliminates risk of tipping.
- Light Grey RAL 7035, powder-coated finish and modern design.
- Manufactured in accordance with ISO 9001 for quality management systems and ISO 14001 for environmental management systems.

PRODUCT SPECIFICATIONS

Model	External Height (mm)	External Width (mm)	External Depth (mm)	Drawer Height (mm)	Drawer Width (mm)	Drawer Depth (mm)	Capacity (litres)	Net Weight (kg) 1h / 2h	No. of Drawers
2 Drawer	784	551	779	290	387	604	136	194 / 197	2
4 Drawer	1510	551	779	290	387	604	272	321 / 328	4



MODEL SHOWN: DATAGUARD NT M-130



NT Fire 017
120 Diskette

DATAGUARD NT

FIRE-RESISTANT DATA MEDIA PROTECTION

KEY FEATURES

- Certified NT Fire 017 – 120 Diskette for two-hour protection of data media from fire.
- Single-door safe with no insert required – maximising internal capacity and up to 60% more storage space than other safes in the same class.
- User-friendly, slam-action door. When shut, provides full fire protection without needing to be locked.
- Adjustable shelving and drawer units supplied as standard.
- Available in three models, ranging from 48 to 128 litres.
- Choice of key or electronic locking.

PRODUCT SPECIFICATIONS

Model	External Height (mm)	External Width (mm)	External Depth (mm)	Internal Height (mm)	Internal Width (mm)	Internal Depth (mm)	Volume (litres)	Net Weight (kg)
40 (M-50)	700	546	566	450	346	306	48	190
80 (M-90)	1025	546	590	775	346	330	89	263
120 (M-130)	1025	702	590	775	502	330	128	330

SPECIFICATIONS FOR **OPTIONAL FITTINGS** ARE AVAILABLE ON PAGE 33



MODEL SHOWN: DATAPLUS M-110

DATAPLUS

FIRE-RESISTANT DATA MEDIA PROTECTION



KEY FEATURES

- Easy slam action emergency closing in event of a fire.
- Generous capacity.
- High-quality media protection.
- Two-hour data media protection label. Tested to the highest international standards, UL 72 and EN 1047-1. DataPlus is certified as Class 125 2hrs with drop test by UL. EN Norm is certified by ECB•S in class S 120 DIS for fire resistance.
- Burglary protection in accordance with European norm EN 14450 and certified by ECB•S in security class S2.
- Easy to transport and install.
- Low weight ratio due to new advanced fire protection barrier material.
- Ability to customise by using internal fittings to optimise your storage capacity.
- Ability to base fix to the floor for effective prevention of physical removal.
- Removable front plate allows useage of a pallet loader for more efficient installation, reducing costs to the customer.
- The cabinet is fitted with a key lock as standard. However, you may require the monitoring of access to your sensitive data and therefore we have a series of electronic locks ranging from basic locking to more sophisticated audit trails.
- The cabinet is an attractive light grey which fits in well in most office interiors.

PRODUCT SPECIFICATIONS

Model	External Height (mm)	External Width (mm)	External Depth* (mm)	Internal Height (mm)	Internal Width (mm)	Internal Depth (mm)	Capacity (litres)	Net Weight (kg)
M-110	911	746	780	565	490	400	111	315
M-165	1191	746	780	845	490	400	167	390
M-220	1471	746	780	1125	490	400	221	490
M-315	1941	746	780	1595	490	400	313	640
M-555	1941	1036	830	1570	780	450	556	860

SPECIFICATIONS FOR **OPTIONAL FITTINGS** ARE AVAILABLE ON PAGE 33

* Gross measurement inc. 60mm for handle which can be removed for installation.



PISTOL SAFE

BURGLARY-RESISTANT SAFE



KEY FEATURES

- Designed to protect pistols from theft
- Supplied with a key lock
- Incorporates anti-drill protection
- Welded lock strap behind lock

PRODUCT SPECIFICATIONS

Model	External Height (mm)	External Width (mm)	External Depth (mm)	Internal Height (mm)	Internal Width (mm)	Internal Depth (mm)	Net Weight (kg)	Standard Internal Fittings
Pistol Safe	140	320	250	128	308	218	16	–

Dimensions exclude handle and hinge projections.



MODEL SHOWN: DEPOSIT CONTAINER

DEPOSIT CONTAINER

BURGLARY PROTECTION FOR YOUR VALUABLES



KEY FEATURES

- Ideal for a small retailer to secure documents or cash
- Provides access to multiple people without reducing security
- Convenient deposit of cash
- 8mm solid steel construction
- Electronic or key lock

PRODUCT SPECIFICATIONS

Model	External Height (mm)	External Width (mm)	External Depth (mm)	Internal Height (mm)	Internal Width (mm)	Internal Depth (mm)	Net Weight (kg)	Standard Internal Fittings
T1-27KD	270	350	345	260	340	290	20	–

Dimensions exclude handle and hinge projections.



MODEL SHOWN: DRUG CABINET

DRUG SAFE

STORAGE FOR PRESCRIPTION DRUGS




KEY FEATURES

- Suitable for storage of prescription drugs
- Ideal for hospitals, doctor's surgeries, pharmacies or any other situation where securing stock is required
- Supplied with key lock
- Constructed from 10mm solid steel
- Each model is supplied with shelves
- Available in 3 sizes
- Welded strap on lock body
- Boltwork encased when retracted
- Complies with all state codes.

PRODUCT SPECIFICATIONS

Model	External Height (mm)	External Width (mm)	External Depth (mm)	Internal Height (mm)	Internal Width (mm)	Internal Depth (mm)	Capacity (litres)	Net Weight (kg)	Standard internal fittings
DC1	350	240	150	330	220	130	10	27	3 shelves
DC2	600	450	150	580	430	130	32	66	4 shelves
DC3	900	600	300	880	580	260	132	160	5 shelves

Dimensions exclude handle and hinge projections.

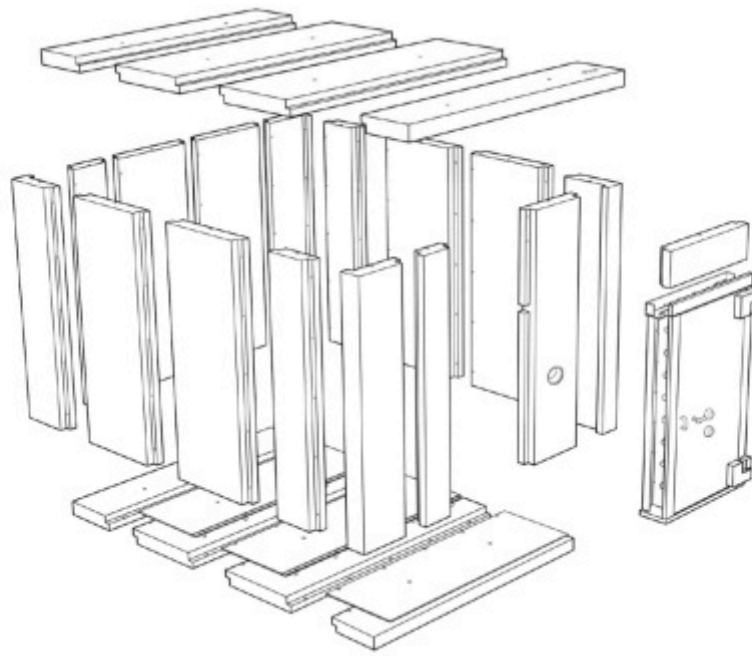

INSTAVault


BURGLARY RESISTANT VAULT

KEY FEATURES

- Patented Chubb safes barrier materials
- 3 levels of security with panel thickness of 75mm, 110mm and 150mm
- Standard, extended and multi-bay sizes can accommodate almost any space requirement
- Full engineering and install support services provided
- Customised internal and external fit-outs available
- Install on a prepared concrete surface or for added security add an InstaVault floor system
- Fitted with an emergency breather tube. Emergency powered ventilators can be provided as an optional extra
- Extend, reduce and relocate your vault as your needs change

Model	Barrier (mm)	Internal Height (mm)	Internal Width (mm)	Internal Depth (mm)	External Height (mm)	External Width (mm)	External Depth (mm)	Match with Chubb safes Vault Door**
LS75	75	2400	2500	2500	2475	2650	2650	Holworthy 70mm
MS110	110	2400	2500	2500	2510	2720	2720	Pacific 100mm
HS150	150	2400	2500	2500	2550	2800	2800	Bankers 130mm

*External height dimensions without an optional Chubb safes InstaVault floor

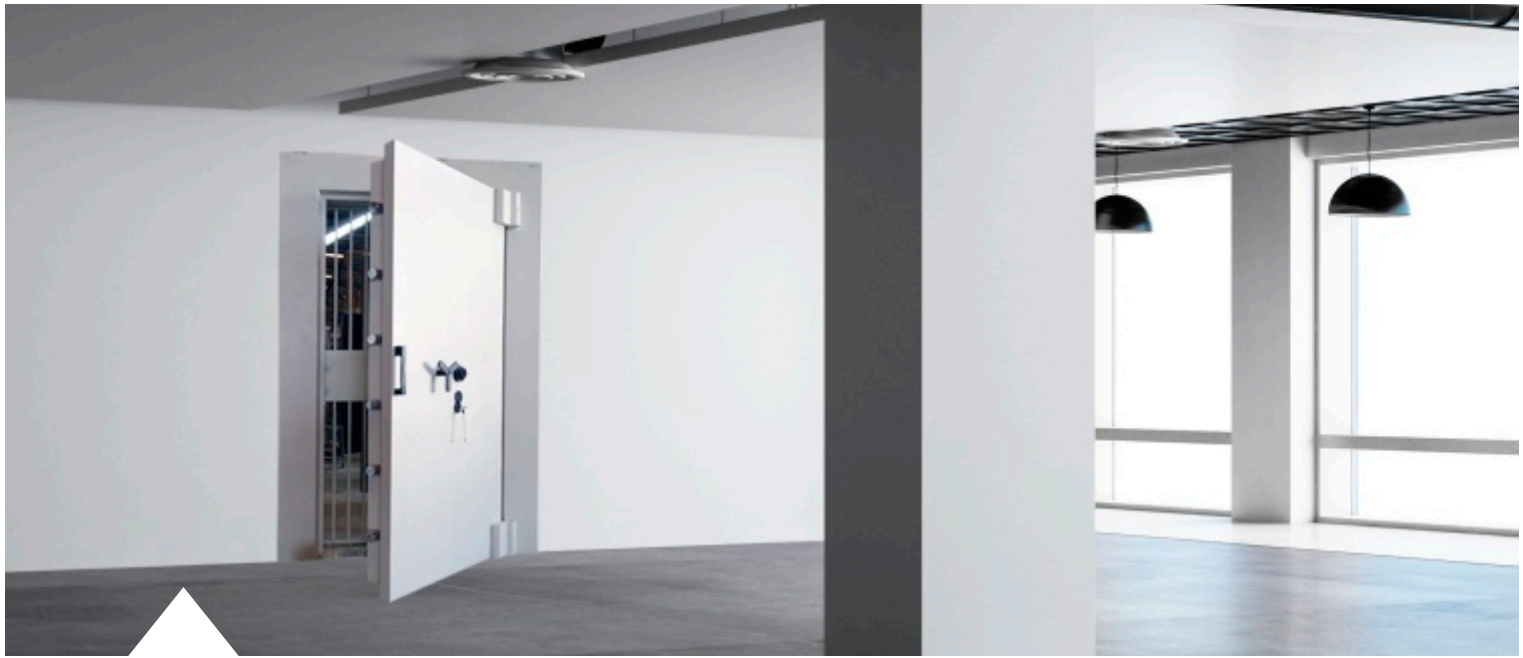

VAULT DOORS

BURGLARY-RESISTANT VAULT DOORS

KEY FEATURES


- Patented Chubb safes barrier materials
- Standard locking configurations can be complimented by alternative digital, key and KCL locks
- TOR barriers from 70mm to 130mm
- Custom and oversized versions available
- Relocking devices provided for enhanced attack protection
- Standard internal emergency release mechanism

Model	Barrier (mm)	Clear Opening Height (mm)	Clear Opening Width (mm)	InstaVault Wall (mm)*	Locking	Weight (kg)	Masonry Opening Height (mm)	Masonry Opening Width (mm)
Holsworthy	70	1917	920	75	1 x 3 KCL	820	2050	1130
Pacific	100	1917	920	110	1 x 4 WKCL	1020	2050	1130
Bankers	130	1914	878	150	2 x 4 WKCL	1280	2050	1130


*Chubb safes Vault Doors are matched to Chubb safes InstaVault solutions, but are also used for poured Vault installations.

OPTIONAL FITTINGS


ARCHIVE CABINET

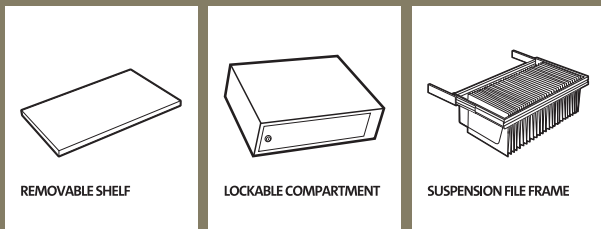


DATAGUARD NT

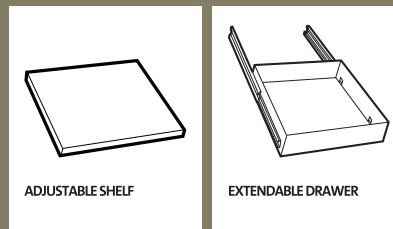


DATAPLUS

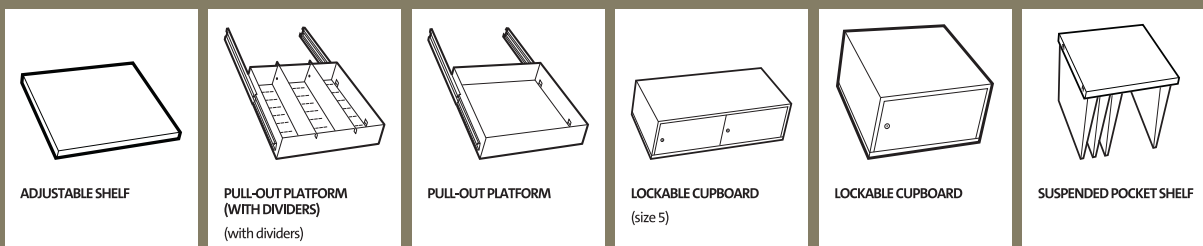


DPC

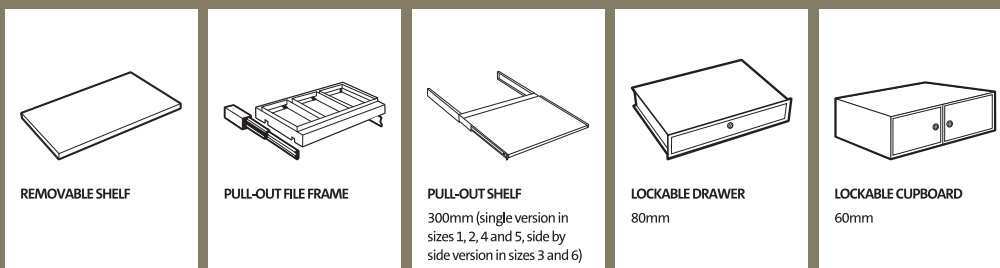

DUOGUARD G0-GII

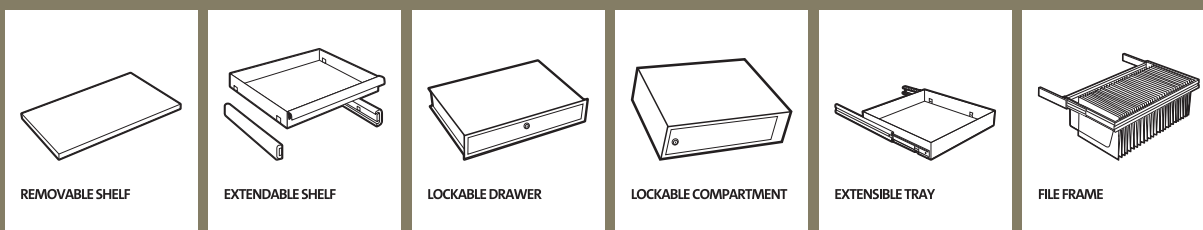

EUROPA



www.chubbsafes.com.au

Authorised dealer

